
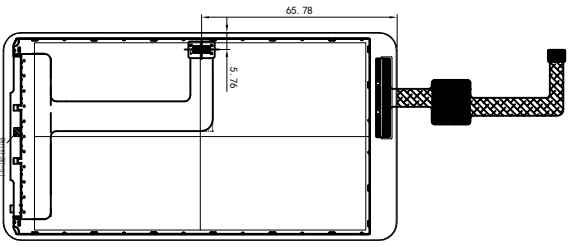
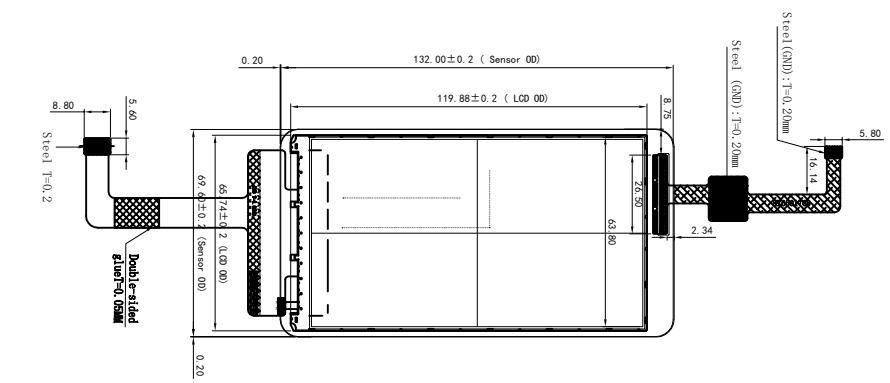


No ROHS hazardous material


Original	Modify content description	Cartographer	Date of change
△			
△			

FIN DESCRIPTION

NO	NAME
1	VDD28
2	IOVDD18
3	GND
4	LRSTB
5	LPTE
6	GND
7	GND
8	LCD_ID
9	GND
10	LGM_PWM
11	GND
12	GND
13	VLED_P(LED A)
14	VLED_N(LED K)
15	VLED_N(LED K)
16	MIP1_TDN3
17	MIP1_TDP3
18	GND
19	MIP1_TDN0
20	MIP1_TDP0
21	GND
22	MIP1_TCN
23	MIP1_TCP
24	GND
25	MIP1_TDN2
26	MIP1_TDP2
27	GND
28	MIP1_TDN1
29	MIP1_TDP1
30	GND

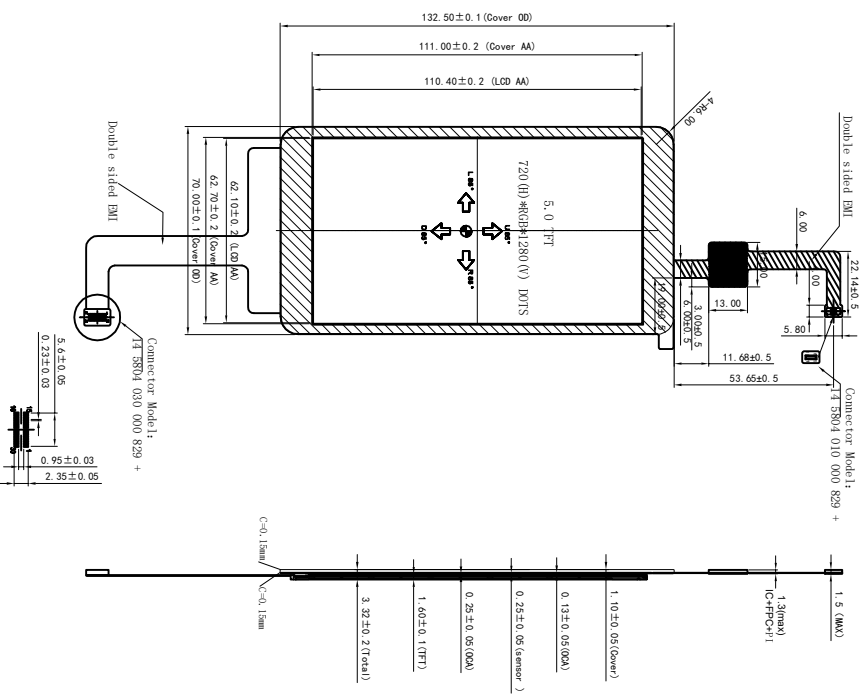

FPC Bending Packaging



Front view

Side view

Back view

Screen printing area: Print Black

技术参数

1. Interfaces	LC	7. Humidity range	45~85RH
2. structure : (optical lens)	GR-FULL	8. Transmittance	≥85%
3. IC solder ions	CTMA558	9. Surface hardness	≥6H, AF
4. Inner resistance	30.00ΩA Steel Ball/132g/Height=35mm/Time	10. Operate :	-20C~+70C, ≤85RH
5. Touch points	10 points	11. Storage :	-30C~+80C, ≤85RH
6. power supply:	3.3V	12. Unmarked dimension tolerance	as±0.15

TP	PIN:
1	INT(3.3V)
2	SCL(3.3V)
3	SDA(3.3V)
4	RST(3.3V)
5	VDD(3.3V)
6	VCC(3.3V)
7	SMDIO
8	GND
9	GND
10	GND



杭州宏晷科技有限公司
Grahwolet Technology CO., Ltd

Model	HX0501708	view direction	Unit	MM
Version	V2.0	Designer	JOE	Date
Customer	Approved	HBZ	Date	2017-9-29
			Proportion	1:1