
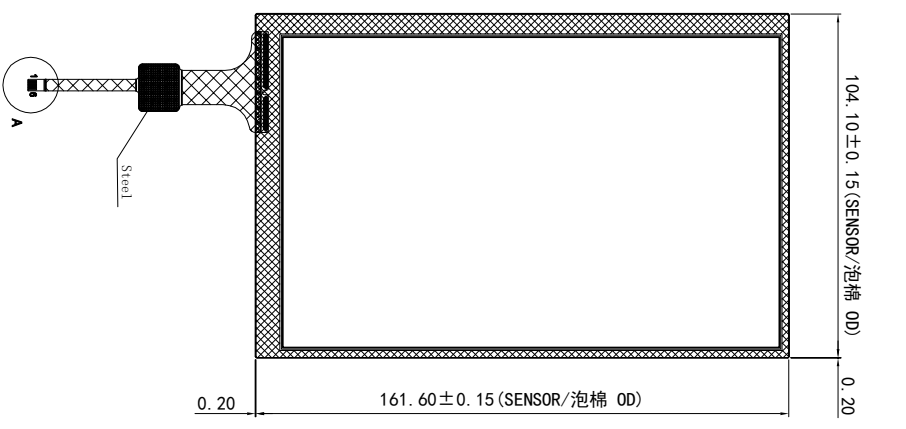
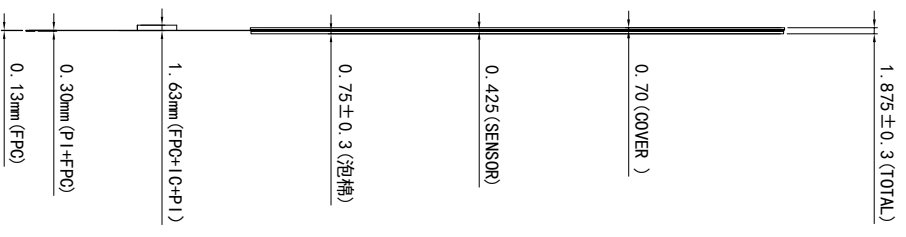



No ROHS hazardous material

Ordinal	Modify content description	Cartographer	Date of change
△			
△			

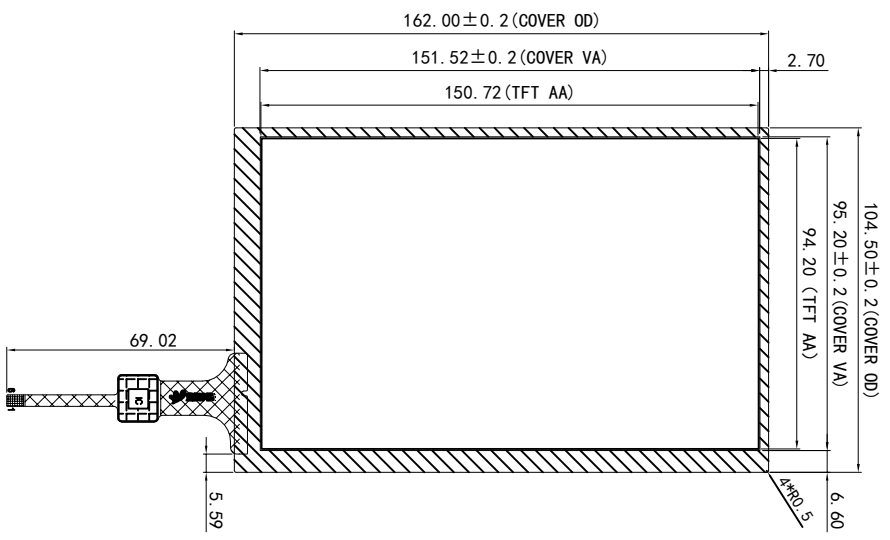

 Screen printing area: Print Black

Front view


 Frame Adhesive Foam Area = 0.75mm

Side view


Back view

Technical parameters

	TP	PIN:
1. Interfaces:	IIC	GND
2. Structure :	GF+GF	VCC(3.3V)
3. IC solutions:	FT5316	INT(3.3V)
4. Impact resistance	25.000N, SteelBall	RST(3.3V)
5. Touch points:	10 points	SCL(3.3V)
6. Power supply:	3.3V	SDA(3.3V)
7. Humidity range:	45~85%RH	
8. Transmittance:	≥85%	
9. Surface hardness:	≥6H	
10. Operate :	-10°C~+60°C, ≤85%RH	
11. Storage :	-20°C~+70°C, ≤85%RH	
12. Unmarked dimension tolerance	as±0.2	



杭州宏睿科技有限公司
GraHowlet Technology CO., Ltd

Model	Version	Designer	Date	view direction	Unit
HX0701711	V2.0	LU0	2017-11-10		MM
Customer	Approved	Date	Proportion		
	HBZ	2017-11-10	1:1		