
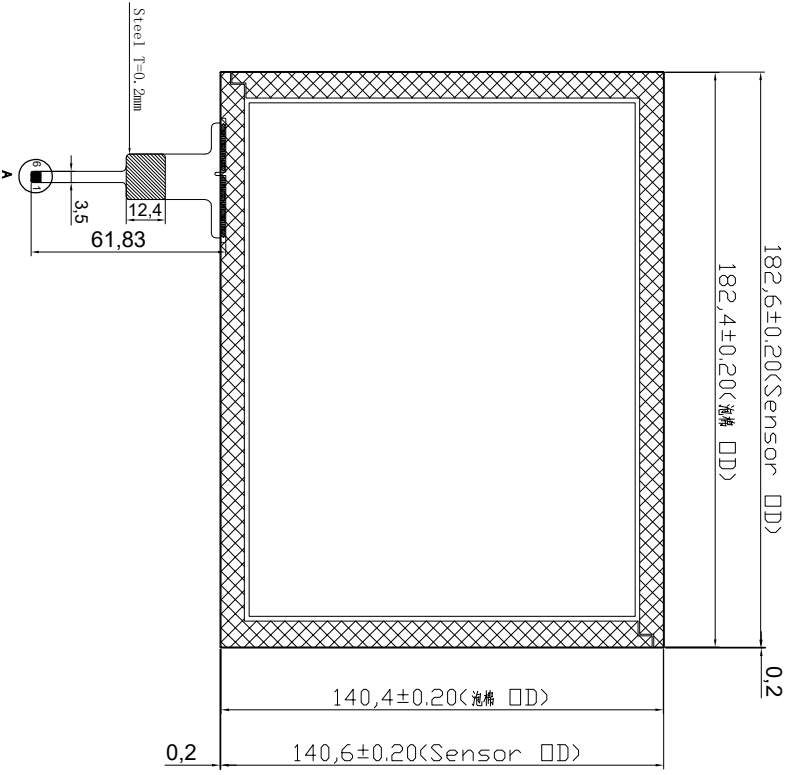
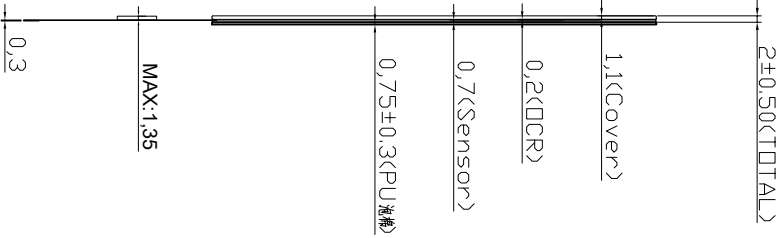


Screen printing area: Print Black

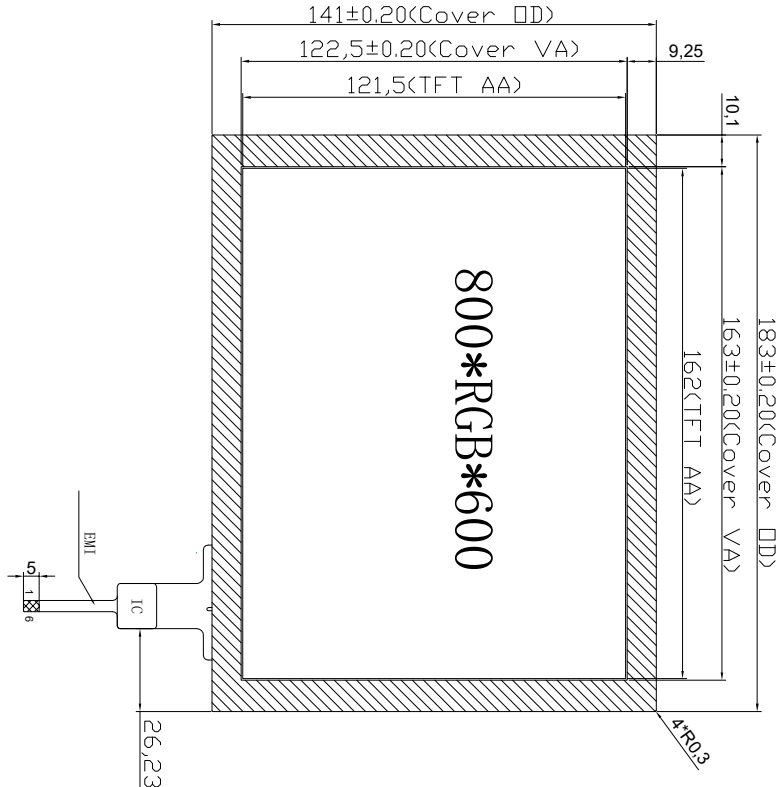

Frame adhesive foam area = 0.75mm

Front view

Side view

Back view

Technical parameters				TP	PIN:
1. Interfaces:	12C	7. Humidity range:	45~85%RH	1	INT 3. 3V
2. Structure :	G+G	8. Transmittance:	≥85%	2	VDD 3. 3V
3. IC solutions:	CYMA568	9. surface hardness:	≥6H	3	SCL 3. 3V
4. Impact resistance:	36.000H, Steel Ball / 132g/100cm-Slow/Time	10. Operate :	-20℃~+70℃, ≤85%RH	4	SDA 3. 3V
5. Touch points:	5 points	11. Storage :	-30℃~+80℃, ≤85%RH	5	RST 3. 3V
6. Power supply:	3. 3V	12. Unmarked dimension tolerance	as±0. 2	6	GND



DETAIL "A"

		杭州宏梟科技有限公司			
Model1		HX0801806		view direction	Unit MM
Version	V1. 0	Designer	LU0	Date	2018-4-03
Customer		Approved	HBZ	Date	2018-4-03
				Proportion	1: 1