



No ROHS hazardous material

Ordinal	Modify content description	Cartographer	Date of change
△			
△			

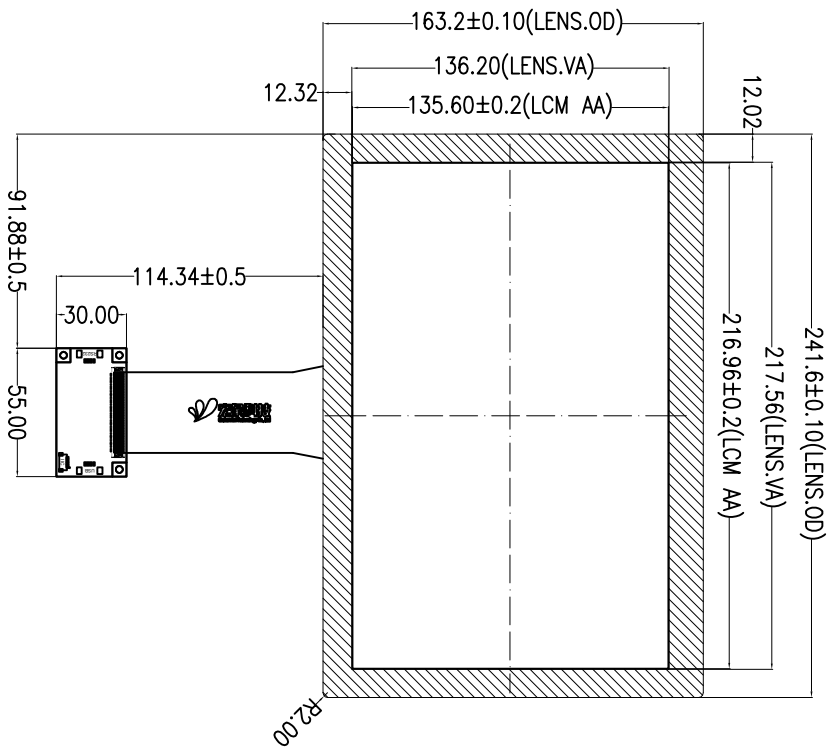


Screen printing area: Print Black

Front view

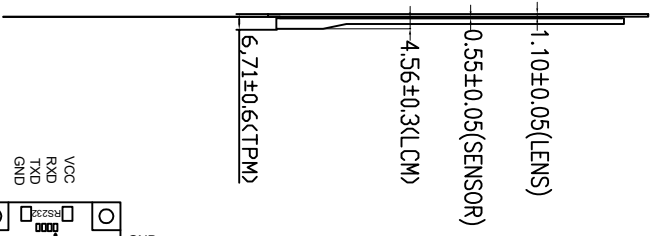


Double-sided Frame adhesive =0.175mm (3M9495)

Side view

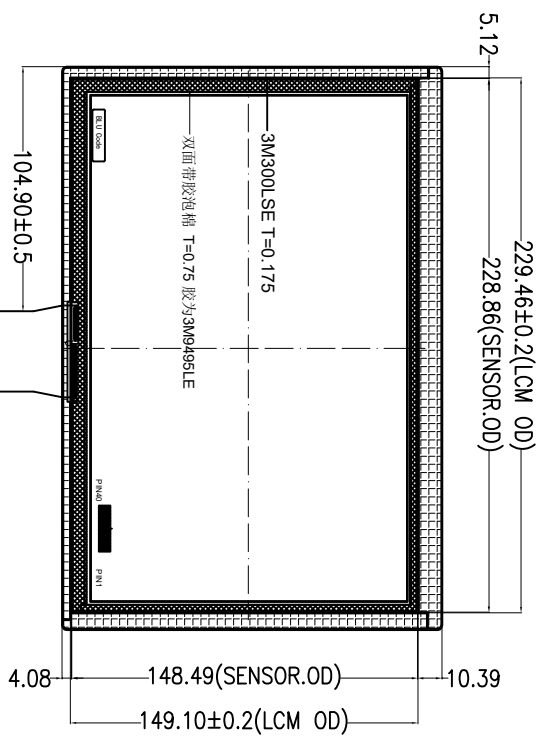

Back view



USB Connector (J1)

- 1 VCC (5V)
- 2 DN
- 3 DP
- 4 GND

Technical parameters

1. Interfaces:	USB	8. Transmittance:	≥85%
2. Structure :	G+G	9. Surface hardness:	≥6H
3. IC solutions:	II, I2511	10. Operate :	-20℃~+70℃, ≤85%RH
4. Impact resistance	30.000A Steelball /132g/Height=30mm/Time	11. Storage :	-30℃~+80℃, ≤85%RH
5. Touch points:	10 points	12. Brightness:	350cd/m2
6. Power supply:	5V	13. Viewing angle:	85/85/85/85
7. Humidity range:	45~85%RH	14. Unmarked dimension tolerance	as±0.2

TFT M10INWB R6 > PIN:

1	2	3	4	5	6	7	8	9	10	11	12	13	14
NC	VDD	VDD	VDD-GND	SEC-GND	SP-GND	NC	L V0N	L V0P	GND	L VIN	L VIP	GND	L VEN
15	16	17	18	19	20	21	22	23	24	25	26	27	28
L V2P	GND	L V0LN	L V0LN	GND	L V3N	L V3P	GND	L DP-GND	L DP-GND	L DP-GND	NC	L DP-PW	L DP-EN
29	30	31	32	33	34	35	36	37	38	39	40		
NC	NC	L DP-VCC	L DP-VCC	L DP-VCC	NC	BI ST	NC	NC	NC	NC	NC		

杭州宏梟科技有限公司
Grahowlet Technology CO., Ltd

Model	Version	Designer	Date	Unit
HX1011704	V1.0	LI00	2017-4-11	MM

Customer	Approved	HBZ	Date	2017-4-11	Proportion	1:1
----------	----------	-----	------	-----------	------------	-----